




# Watershed Protection Development Review

## INTEROFFICE MEMORANDUM Commercial Plumbing Inspections Acceptable Reclaim System Criteria June 22, 2003

The first component of a reclaim system must be the Sand-Oil Interceptor and must be sized according to the Water and Wastewater Special Services Industrial Waste Criteria.

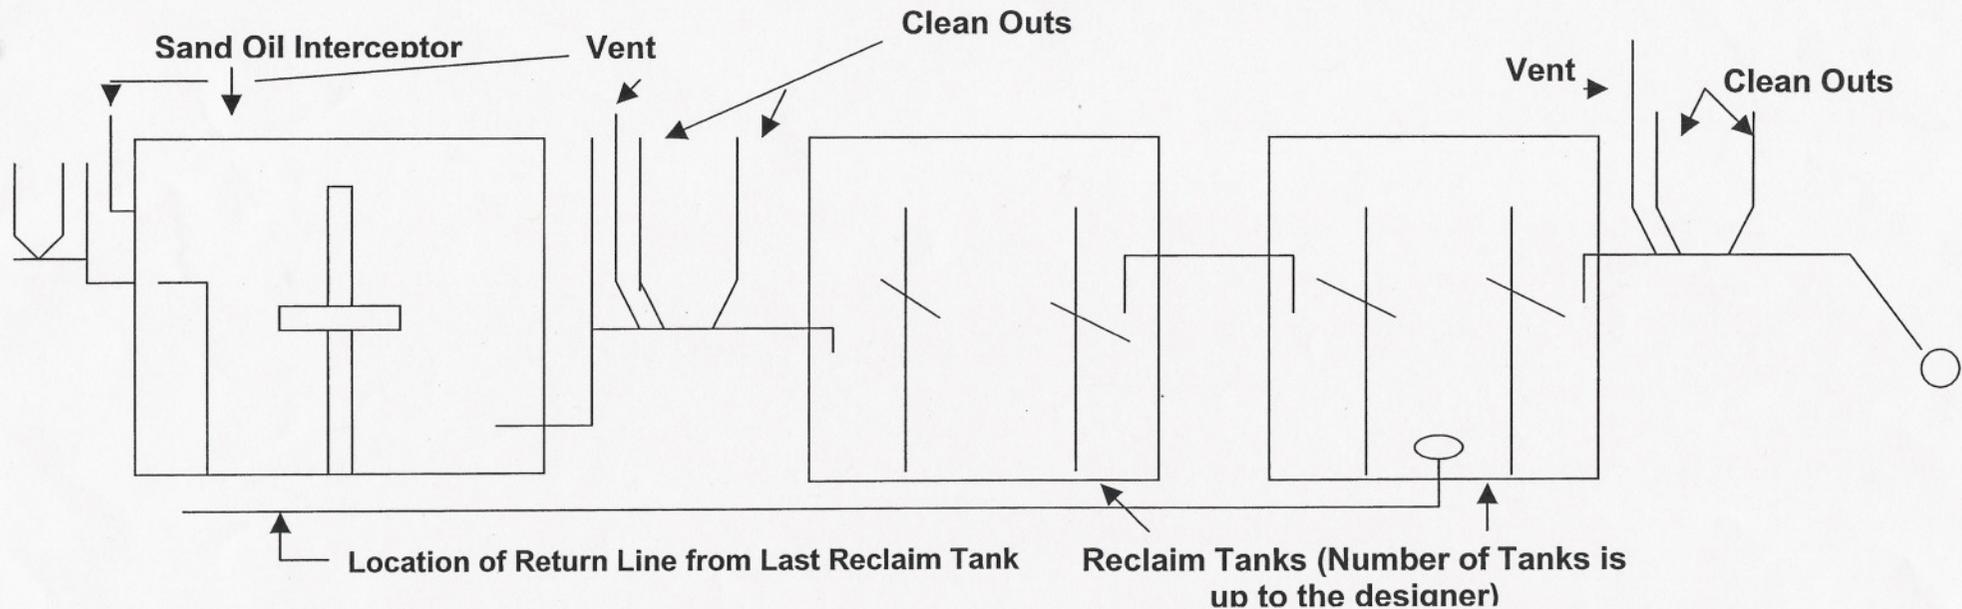

The suction for the return for the reclaim system may be taken from the next-to-last chamber of the reclaim tank. No suction from the last chamber of the reclaim tank shall be permitted. Plumbing Plan Review and Industrial Waste shall approve all submitted designs. All submittals of a reclaim design shall be approved and inspected according to the approved plumbing code.

Chief Plumbing Inspector: Danny M. Lee ACTING C.P.I.

Date: 6/22/04